

Stanford DM12 Shrink Sleeve Inspector



Features

- Manual inspection button with return-to-defect
- Intuitive touchscreen controls with unlimited recipes
- Electronic rewind oscillation up to 20 mm [0.75"]
- Cantilevered compact design
- Reversible over/under winding

- Automatic inspections for seam integrity, solvent presence and splice/flag detection.
- Two-motor smart AC Vector drive system
- On-board drive based PAC Control
- Internet based remote diagnostic with WiFi capability

BW Packaging Systems represents the collective capabilities of Barry-Wehmiller packaging companies including, Accraply, BW Flexible Systems, BW Integrated Systems, Pneumatic Scale Angelus and Synerlink. Through their diverse capabilities, these companies can collectively provide everything from a single piece of equipment to fully integrated packaging systems for a wide range of industries, including: food and beverage, personal care, container manufacturing, pharmaceutical and medical devices, household products, paper products and textiles, industrial and automotive, and converting, printing and publishing. For more information, go to *BWPackagingSystems.com*



Stanford DM12 Shrink Sleeve Label Inspector




Don't throw out bad material - Doctor it.

The DM12 has many advanced features to simply this process. A manual inspection button allows the operator to return the detected defect to the splice table automatically, while automatic inspection for UV, seam integrity, and flags will return the defective location to the splice table.

Designed specifically for shrink-sleeve applications, the DM12 compliments Stanford's Seamer line. To save valuable floor space, we designed the most compact vertical seam inspection machine on the market. The DM12 requires only two square feet for installation.

Fully-cantilevered, with a intuitive touchscreen, the DM12 is designed for fast production with speeds up to 500 mpm (1,640fpm).

Accraply engineers a large selection of Stanford Doctor Machines®, a complete line of duplex differential slitter rewinders and shrink sleeve finishing equipment, as well as customized equipment.

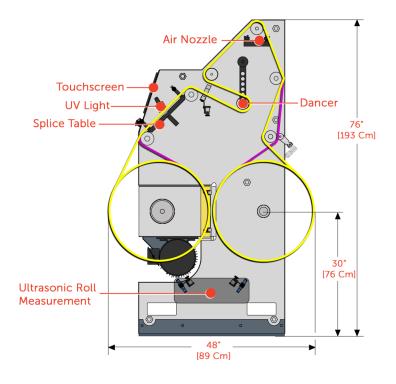

Minimum	50mm
Layflat Width	[2"]
Maximum	305 mm
Layflat Width	[12"]
Maximum	500 mpm
Web Speed*	[1,640 fpm]
Maximum	610 mm
Unwind Diameter	[24"]
Maximum	610 mm
Rewind Diameter	[24"]
Tension	0.26 Kg/Cm [1.5 PLI]
Total Minimum	1.58 Kgf
Tension	[3.5 lbf]
Shaft Options	76.2 mm,127 mm,152 mm [3",5", 6"]
Machine Options	UV Detection Bubble Detection Flag Detection Splice Detection Strobe Light

Accraply's Gold Standard of Service

"We commit to deliver the highest level of customer care driven by our passion to provide the best customer experience in everything we do."

Accraply | Trine | Stanford | Graham & Sleevit | Harland



 9350 W Broadway Avenue, Suite 190
 +1 (763) 557-1313

 Minneapolis, MN 55445 USA
 accraply.com

